



## Hidden Security Fixings for hanging pictures

### METHOD 2 (HANGING PLATE)


*The SpringLOCK is a two part component consisting of a Bridge and a Locking Spring Insert. Depending on the amount of security required 2 or more SpringLOCKS can be used or alternatively SpringLOCKS can be used with the Top Slot Hanging Brackets if preferred.*

1. Secure 2 Top Slot Hanging Brackets to the top of the frame equidistant from each side of a picture. Fix a single SpringLOCK centre of the bottom as shown on the photograph to the right. For added security 2 SpringLOCKS could be used at the bottom, fitted equidistant from each side of the frame.



2. Position the picture on the wall in place. Mark the position on the wall of one of the Top Slot fixings and measure between the centres of the two Bracket Slots for the second screw position. With the use of a level mark the other screw position on the wall. Drill the marked screw positions and plug. Insert screws leaving the heads about 5mm clear from the wall.

3. Drop the picture onto the screws in the wall, locating the slots of the top brackets down onto the exposed screws. Check if the picture is level. If not, the Slot Fixing allows a little vertical adjustment by use of the slots through which the bracket is screwed to the frame.

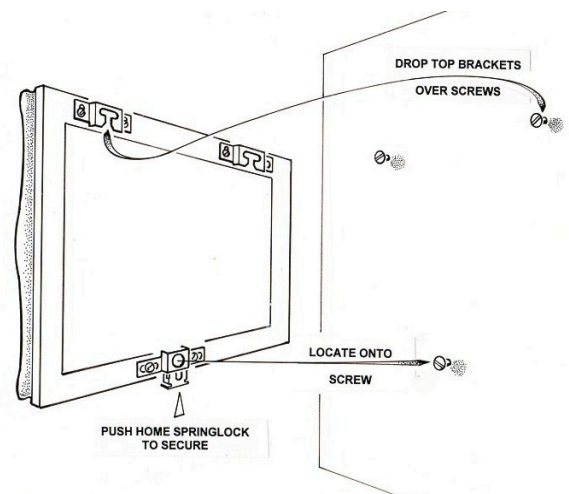

4. When you are satisfied that the picture is level, pull back the Locking Spring Insert from the bottom SpringLOCK with a SpringLOCK Release and Marker Tool. Engage the marker in the open hole of the SpringLOCK Bracket as shown below.



5. With the picture back in position on the wall hanging from the top 2 screws and the Marker Tool located in the open hole of the SpringLOCK, gently tap against the frame at the tool position. A mark will be made at the exact screw point location on the wall. Drill and plug the mark. Insert screw leaving the head exposed by 5mm and position the open SpringLOCK over the exposed screw head. Push in Locking Spring Insert to lock the picture on to the wall.