




# PALETTE WOOD DYE



250ml  
500ml  
5L

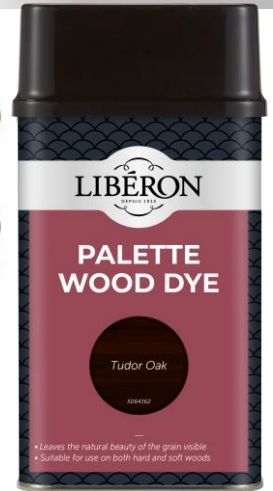

*The water-based Liberon Palette Wood Dyes are ideal for dyeing/colouring all interior bare woodwork, whilst leaving the natural beauty of the grain visible. For use prior to oil, wax, varnish and French polish finishes, they are suitable for both soft and hardwoods. Quick and uniform results can be achieved on large and small surfaces such as furniture, floors, doors, cupboards, frames etc. Available in a range of wood shades, the different colours can be mixed together to create unique shades.*

- Leaves the natural beauty of the grain visible
- Suitable for use on both hard and soft woods

## PREPARATION

Ensure the surface is thoroughly sanded, dry, bare and free from dust.

## APPLICATION

Shake well before use. If more than one tin of dye is required to complete the work, mix the tins of dye together to ensure a uniform colour. Apply the Wood Dye fairly quickly along the grain using a foam applicator or brush. Wipe off any excess with a clean, dry, cotton cloth before it dries to even out the colour. On large surfaces, such as floors, avoid overlap marks by working a small section at a time. A second coat may be applied after 2 hours if a stronger colour is required. Note: more than two coats of dye may affect the final finish. Liberon Palette Wood Dye may be added to Liberon water-based varnishes to tint or colour the varnish. Remove as much of the product as possible from the tools after use. Do not dispose of residues and washing water/ solvents in the sink, toilet, sewer, bin, etc., in order to avoid discharge into the environment.

**Important:** Always test product on a spare surface or inconspicuous area for colour, compatibility and end result. Different types of wood produce different results. The colour bar may not be a true representation of the actual colour.

## PRECAUTIONS

- Do not mix a water-based dye with a spirit-based dye.
- Wear gloves to avoid staining skin.
- Caution must be taken when using water-based finishes over Liberon Palette Wood Dye. Keep brush strokes to a minimum as overbrushing may lift out the colour.



DRYING  
TIME

2h



COVERAGE

500ml = 4-8m<sup>2</sup>



APPLICATION

Foam Applicator  
or Brush



TOOL  
CLEANING

Water

This product should be used in accordance with the manufacturer's instructions. Recommendations are for guidance only since conditions of use are completely beyond our control. For technical or practical information on this or other Liberon products please contact Liberon Technical Services on 01797 367555.

This notice is intended to provide information. The information is based on our current knowledge and experience based on conditions of use that comply with the standards or DTU in force. Given the multiplicity of factors that can influence the use of our products, they cannot exempt the user from his own experiences. No legal warranty can be derived from our information. This data sheet supersedes all previous editions.